




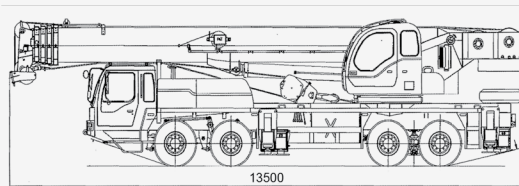

Especificações Técnicas

| | | |
|-----------------------------|-----------------|---------|
| Capacidade Total | 70 t a 3 m | |
| Dimensões: | | |
| Comprimento | Largura | Altura |
| 13.500mm | 2.800mm | 3.540mm |
| Lança Principal 5 seções | 11,0 m - 42,0 m | |
| Lança Auxiliar 2 seções | 8,5 m - 15,0 m | |
| Peso: | | |
| Peso Bruto | 43.000 kg | |
| Eixos dianteiros | 17.000 kg | |
| Eixos traseiros | 26.000 kg | |
| Moitão: | | |
| Capacidade | Polias | Peso |
| 70 t | 6 | 616 kg |
| 35 t | 3 | 370 kg |
| 4 t | 0 | 100 kg |

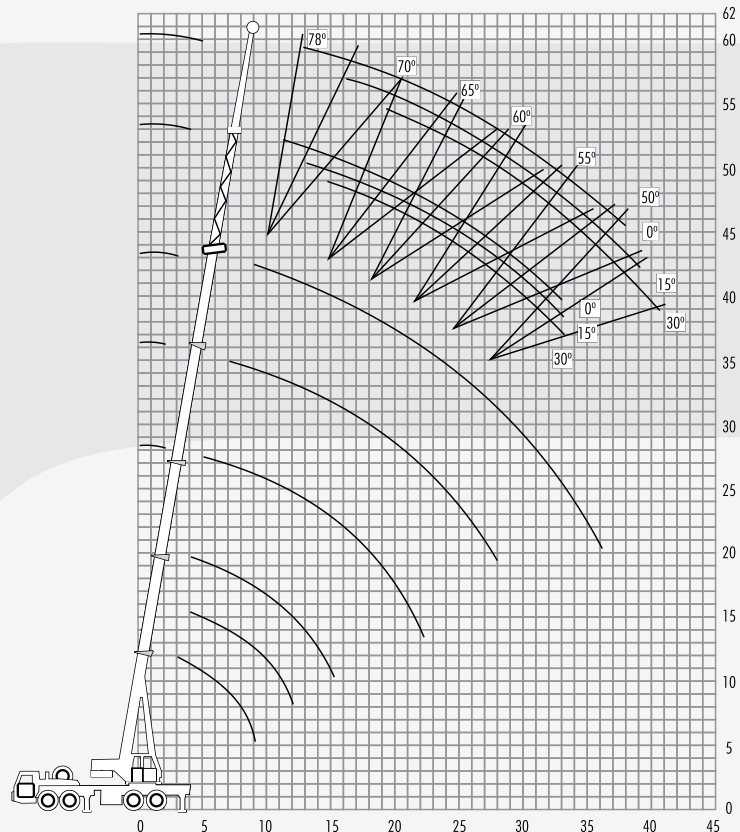

| | Principal | | | | | | Auxiliar | 8.5m | | | 15.0m | | |
|--------|-----------|-------|-------|-------|-------|-------|----------|------|------|------|-------|------|------|
| | 11.2m | 15.0m | 18.9m | 26.6m | 34.3m | 42.0m | | 0° | 15° | 30° | 0° | 15° | 30° |
| 3,0 m | 70,00 | - | - | - | - | - | 78° | 4,00 | 2,70 | 2,40 | 2,50 | 1,40 | 1,10 |
| 3,5 m | 63,50 | - | - | - | - | - | 75° | 3,60 | 2,50 | 2,30 | 2,10 | 1,25 | 1,04 |
| 4,0 m | 54,50 | 46,50 | 36,50 | - | - | - | 72° | 3,20 | 2,30 | 2,20 | 1,80 | 1,15 | 0,99 |
| 5,0 m | 47,00 | 40,50 | 35,50 | 22,50 | - | - | 70° | 2,90 | 2,20 | 2,10 | 1,70 | 1,10 | 0,95 |
| 6,0 m | 38,50 | 33,50 | 33,50 | 22,50 | - | - | 65° | 2,40 | 2,00 | 1,90 | 1,40 | 0,95 | 0,88 |
| 7,0 m | 29,50 | 26,50 | 25,50 | 21,50 | 17,00 | - | 60° | 1,85 | 1,80 | 1,70 | 1,20 | 0,88 | 0,83 |
| 8,0 m | 22,50 | 21,50 | 21,30 | 19,50 | 16,00 | - | 55° | 1,25 | 1,20 | 1,10 | 0,90 | 0,80 | 0,78 |
| 9,0 m | 17,50 | 17,50 | 17,00 | 17,00 | 15,00 | 9,20 | 50° | 0,85 | 0,80 | 0,70 | 0,61 | 0,55 | 0,50 |
| 10,0 m | | 14,00 | 13,80 | 15,20 | 13,50 | 8,90 | | | | | | | |
| 12,0 m | | 9,80 | 9,50 | 10,60 | 11,60 | 8,10 | | | | | | | |
| 14,0 m | | | 6,60 | 8,00 | 9,30 | 7,40 | | | | | | | |
| 15,0 m | | | 5,60 | 7,00 | 8,00 | 7,10 | | | | | | | |
| 16,0 m | | | 5,00 | 6,00 | 7,00 | 6,50 | | | | | | | |
| 18,0 m | | | | 4,80 | 5,50 | 5,50 | | | | | | | |
| 20,0 m | | | | 3,80 | 4,20 | 4,80 | | | | | | | |
| 22,0 m | | | | 2,85 | 3,20 | 3,80 | | | | | | | |
| 24,0 m | | | | | 2,50 | 3,00 | | | | | | | |
| 26,0 m | | | | | 1,90 | 2,30 | | | | | | | |
| 28,0 m | | | | | 1,50 | 1,90 | | | | | | | |
| 29,0 m | | | | | 1,10 | 1,60 | | | | | | | |
| 30,0 m | | | | | 0,85 | 1,40 | | | | | | | |
| 32,0 m | | | | | | 1,10 | | | | | | | |
| 34,0 m | | | | | | 0,85 | | | | | | | |
| 36,0 m | | | | | | 0,60 | | | | | | | |

OBS: Estabilizadores totalmente estendidos (6,9 m) / Estabilizador diant estendido (360°) / Unidade: t